




# COLD ROLLED REBAR MS-60

NMX-B-072

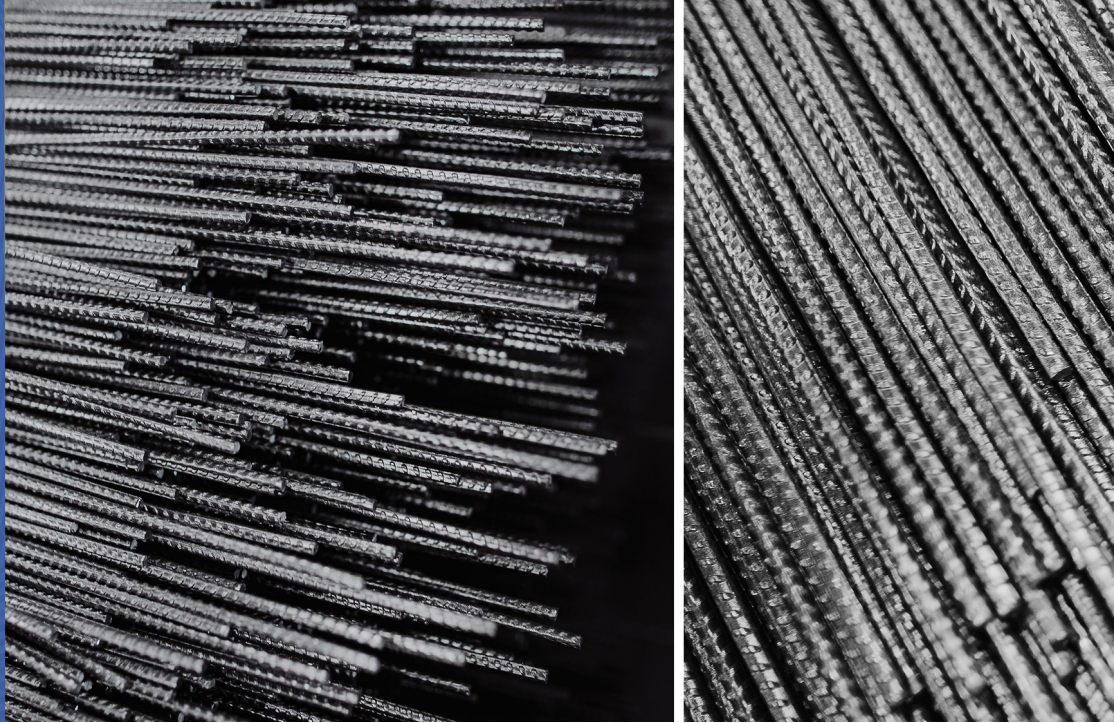

The Cold-Drawn Rebar MS-60 is highly resistant to stress, by its manufacturing process of cold rolling.

With this rebar you save up to 30% of the steel used in construction; compared to traditional hot rolled rebar.

## ► Specifications

Size	Grade	Presentation
5/32"	60	Length 6m and 12m. (Availability to make other lengths)
3/16"		
1/4"		
5/16"		

These products earn the following LEED® credits thanks to regional, recycled material content



**LEED® v4**  
**Prerequisite MRp:**  
Construction and demolition waste management planning.

- **Credit M12:** Construction Waste Management.
- **Building Product disclosure:**
  - Material ingredients
  - Sourcing of raw materials

- **MCr2:** Construction Waste Management.
- **MRC4:** Recycled Content.
- **MRC5:** Regional Materials.